

DUNE™ Second Look®

Scored Tegular
fine texture

USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 100%

10-YEAR
REPLACEMENT PANEL
AVAILABILITY

2711, 2712, 2722

UP TO **47%** RECYCLED CONTENT


Calculate LEED contribution at armstrong.com/greengenie

LEED®

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

\$\$\$

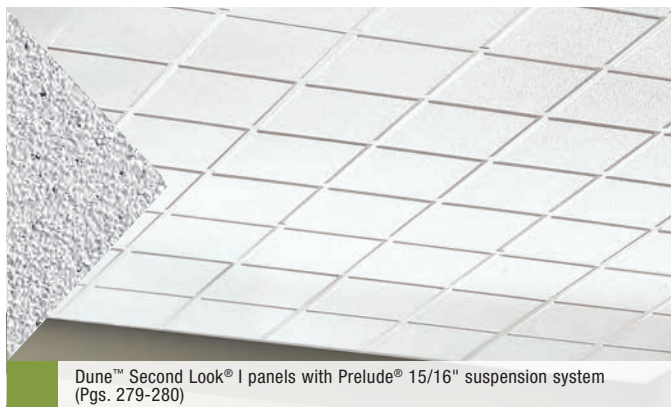

Dune™ Second Look® I panels with Prelude® 15/16" suspension system (Pgs. 279-280)

This fine-textured visual offers geometric scored visuals.

KEY SELECTION ATTRIBUTES

- Upgrade look at a modest price
- USDA Certified Biobased Content – 100%
- Durable – Scratch-resistant
- 30-Year Limited System Warranty against visible sag, mold and mildew

TYPICAL APPLICATIONS

- Specialty shops/stores
- Corridors
- Offices

COLOR



White

VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 295-299 armstrong.com/catdwgs	Item No.	Dimensions (Inches)
DUNE Second Look I			
15/16" Angled Tegular	11	2711	24 x 48 x 3/4"
DUNE Second Look II			
15/16" Angled Tegular	11	2712	24 x 48 x 3/4"
9/16" Angled Tegular	27	2722	24 x 48 x 3/4"

PERFORMANCE SELECTION

Dots represent high level of performance.

UL Classified Acoustics	Total Acoustics ¹	Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Scratch	Recycled Content	Recycle Program	30-Yr Warranty
NRC + CAC	=			Bio-Block	Humi-Guard+					
0.50 35	=	Class A	0.83	•	•	•	•	•	•	•
0.50 35	=	Class A	0.83	•	•	•	•	•	•	•
0.50 35	=	Class A	0.83	•	•	•	•	•	•	•

¹ Total Acoustics™ ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.

DETAILS



1. Dune Second Look
2. Dune Second Look with Suprafine® 9/16" suspension system

SUSPENSION SYSTEMS



FACE VIEW



Second Look I panel – Scoring creates nominal 12" x 12" squares



Second Look II panel – Scoring creates nominal 24" x 24" squares

PHYSICAL DATA

Material

Wet-formed mineral fiber

Surface Finish

Factory-applied latex paint

Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled.)

ASTM E1264 Classification

Type III, Form 2, Pattern C E K
Fire Class A

Humidity/Sag Resistance

HumiGuard® Plus ceiling panel maintain superior sag resistance. Recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew

Ceiling panels with BioBlock® coating contain a mold-inhibiting agent that resists the growth of mold and mildew.

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

High Recycled Content

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value

R Factor – 1.6 (BTU units)
R Factor – 0.28 (Watts units)

Design Consideration

Do not mix Dune Second Look with standard Dune panels in the same room.

30-Year Performance Guarantee & Warranty

When installed with Armstrong® Suspension System. Details at armstrong.com/warranty

Weight; Square Feet/Carton

1.00 lbs/SF; 80 SF/ctn

Minimum Order Quantity

1 carton

Metric Items Available

2711M, 2722M, 2712M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

