

# GRAPHIS® Finetex™

Wrapped Linear™,  
Cubic & NeoCubic™  
fine texture

# GRAPHIS® Rustex™

Cubic Beveled &  
Linear Beveled  
coarse texture



Graphis® Finetex™ Wrapped Linear™ panels with Suprafine® 9/16" suspension system (Pgs. 287-288)



Graphis® Rustex™ Cubic Beveled panels with Suprafine 9/16" suspension system (Pgs. 287-288)

These panels offer bold geometric and linear patterns with unique visual designs.

## KEY SELECTION ATTRIBUTES

### Finetex

- Finely sculptured geometric patterns
- Single- and multi-design options
- High light reflectance
- 30-Year Limited System Warranty against visible sag, mold and mildew

### Rustex

- Bold geometric designs
- Good sound absorption
- 30-Year Limited System Warranty against visible sag, mold and mildew

## TYPICAL APPLICATIONS

- Department stores/retail
- Many types of commercial interiors
- Airports/bus/train stations


NOTE: Finetex panels are not recommended for areas requiring acoustical performance

## COLOR



White

## DETAILS (Other Suspension Systems compatible. Refer to listing on pages 194.)

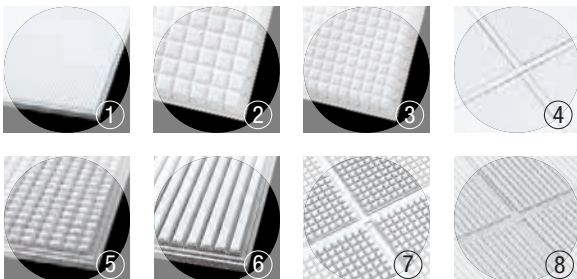

1. Graphis® Finetex™ Wrapped Linear
2. Graphis® Finetex™ Cubic
3. Graphis® Finetex™ NeoCubic™
4. Graphis® Finetex™ Wrapped Linear with Suprafine 9/16" suspension system
5. Graphis® Rustex™ Cubic Beveled
6. Graphis® Rustex™ Linear Beveled
7. Graphis® Rustex™ Cubic Beveled with Suprafine 9/16" suspension system
8. Graphis® Rustex™ Linear Beveled with Suprafine 9/16" suspension system

# GRAPHIS® Finetex™ & Rustex™

Wrapped Linear™,  
Cubic & NeoCubic™  
fine texture

Cubic Beveled &  
Linear Beveled  
coarse texture

UP TO **72%** RECYCLED CONTENT

Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie)

**LEED®**

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

## VISUAL SELECTION

## PERFORMANCE SELECTION


Dots represent high level of performance.

\$\$\$

Edge Profile	Susp. Dwg. Pgs. 295-299 <a href="http://armstrong.com/catdwgs">armstrong.com/catdwgs</a>	Item No.	Dimensions (Inches)	UL Classified Acoustics	NRC + CAC	Total Acoustics <sup>1</sup>	Fire Rating	Light Reflect	Anti-Mold & Mildew Bio-Block	Sag Resist	Durability	Recycled Content	Recycle Program	30-Yr Warranty
<b>GRAPHIS® Finetex</b>														
<b>Wrapped Linear</b>														
9/16" Wrapped Tegular	34	<b>8005</b>	24 x 24 x 3/4" □	N/A	35	—	Class A	0.90	—	—	Std	Std	•	•
<b>Cubic</b>														
36	<b>8006</b>	24 x 24 x 3/4" □	N/A	35	—	Class A	0.90	—	—	—	Std	Std	•	•
<b>NeoCubic</b>														
35	<b>8007</b>	24 x 24 x 3/4" □	N/A	35	—	Class A	0.90	—	—	—	Std	Std	•	•
<b>GRAPHIS® Rustex™</b>														
<b>Cubic Beveled</b>														
15/16" Beveled Tegular	20	<b>2600</b>	24 x 24 x 3/4" □	0.55	30	—	Class A	0.75	•	—	Std	•	•	•
<b>Linear Beveled</b>														
20	<b>2602</b>	24 x 24 x 3/4" □	0.55	30	—	Class A	0.75	•	—	—	Std	•	•	•
<b>Cubic Beveled</b>														
9/16" Beveled Tegular	33	<b>2600</b>	24 x 24 x 3/4" □	0.55	30	—	Class A	0.75	•	—	Std	•	•	•
<b>Linear Beveled</b>														
33	<b>2602</b>	24 x 24 x 3/4" □	0.55	30	—	Class A	0.75	•	—	—	Std	•	•	•

<sup>1</sup> Total Acoustics™ ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.

## SUSPENSION SYSTEMS



## PHYSICAL DATA

**Material**  
Wet-formed mineral fiber

**Surface Finish**  
Factory-applied latex paint

**Fire Performance**  
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled.)

**ASTM E1264 Classification**  
Type III, Form 2, Pattern J Z  
Fire Class A

**Anti-Mold/Mildew** (Rustex only)  
Ceiling panels with BioBlock® coating contain a mold-inhibiting agent that resists the growth of mold and mildew.

**High Recycled Content**  
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

**Insulation Value**  
R Factor - 1.6 (BTU units)  
R Factor - 0.28 (Watts units)

**30-Year Performance Guarantee & Warranty**  
When installed with Armstrong® Suspension System. Details at [armstrong.com/warranty](http://armstrong.com/warranty)

**Weight; Square Feet/Carton**  
0.90 lbs/SF; 48 SF/ctn

**Minimum Order Quantity**  
1 carton

**Metric Items Available**  
2600M, 2602M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.