
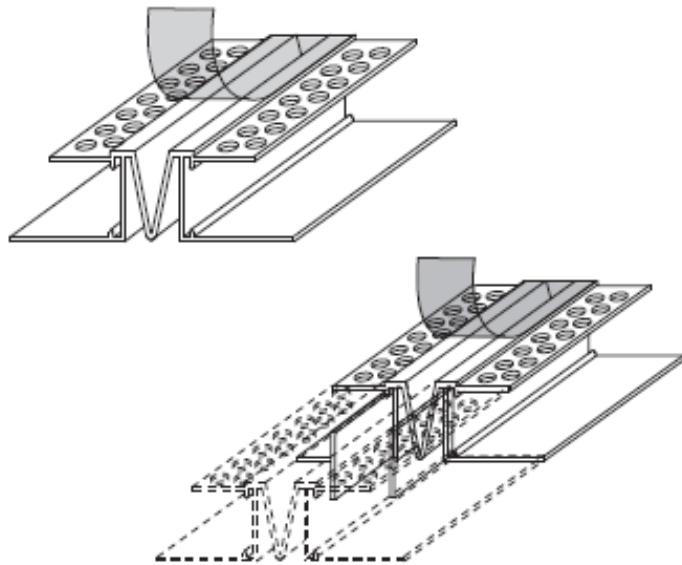


DEFS Control Joints (with Removable Tape)

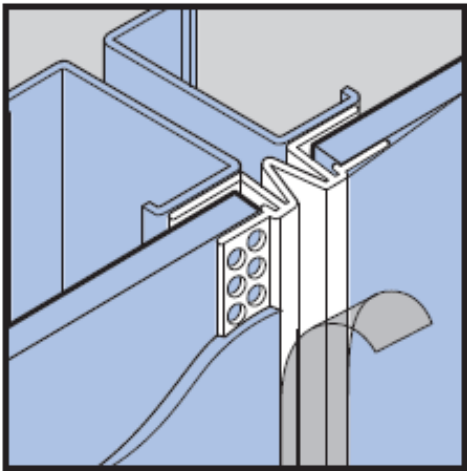

PRODUCT NUMBER	FINISH THICKNESS	INSULATION THICKNESS	DIMENSIONS	PIECES PER BOX
DCJ-50V	1/16"	1/2"	3/16" "V" Reveal, 5/8" perforated flanges	30
DCJ-58V	1/16"	5/8"		30

DEFS Control Joints (With Removable Tape) – Designed by Vinyl Corp.™ to relieve stress caused by expansion and contraction in large areas of walls and ceilings. Tape protects deep "V" expansion slot during construction. Large perforations allow matrix to easily flow thru and anchor to substrate. The Vinyl Corp.™ "Keylock"™ connectors are available for alignment and base for sealant. Recommended usage is for every 130 to 140 sq. ft. with no one side being longer than 15 ft.

Caulk all intersections, butt joints, ends and corners at time of installation.