


LEDGES®

Tegular
smooth texture



Ledges® I panels with Prelude® 15/16" suspension system (Pgs. 279-280)

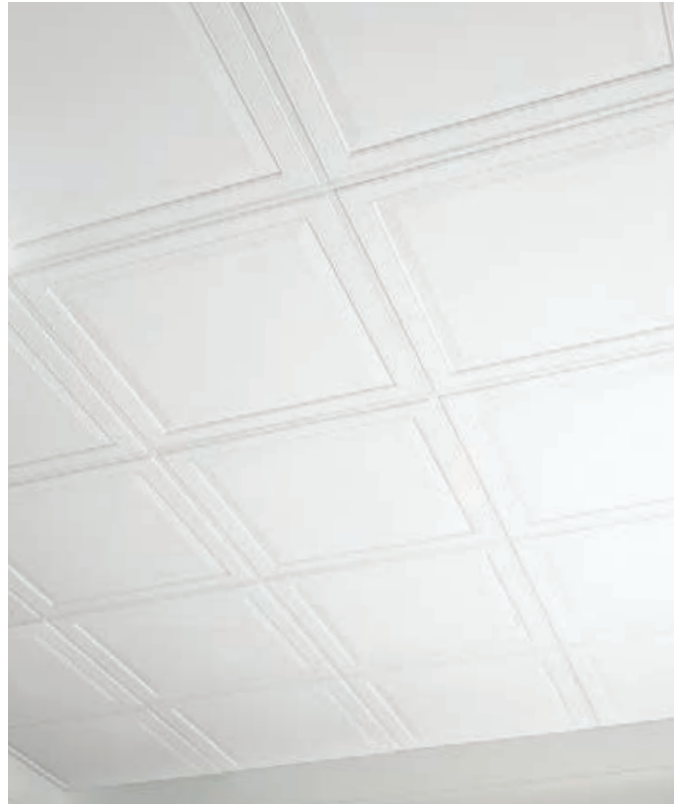

Ledges II panels with Suprafine® 9/16" suspension system (Pgs. 287-288)

The dimensional look of old-world plaster ceilings is available in two classic designs.

KEY SELECTION ATTRIBUTES

- Dimensional, sculptured visual
- Affordable and practical alternative to embossed plaster panels
- Non-directional visual reduces installation time and scrap

TYPICAL APPLICATIONS

- Department stores/retail
- Many types of commercial interiors

NOTE: Not recommended for areas requiring acoustical performance

COLOR



White

FACE VIEWS



Ledges I panel



Ledges II panel

DETAILS



1. Ledges I Flush Tegular
2. Ledges II Flush Tegular
3. Ledges I with Prelude 15/16" suspension system
4. Ledges II with Suprafine 9/16" suspension system

LEDGES®

Tegular
smooth texture

UP TO **43%** RECYCLED CONTENT

Calculate LEED contribution at armstrong.com/greengenie

LEED®





- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- bio-based materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

VISUAL SELECTION

PERFORMANCE SELECTION

Dots represent high level of performance.

\$\$\$

Edge Profile	Susp. Dwg. Pgs. 295-299 armstrong.com/catdwgs	Item No.	Dimensions (Inches)
LEDGES® I			
15/16" Flush Tegular 	3	8011	24 x 24 x 3/4" 
LEDGES II			
9/16" Flush Tegular 	25	8013	24 x 24 x 3/4" 

UL Classified Acoustics		Total Acoustics ¹	Fire Rating	Light Reflect	Anti-Mold & Mildew Bio-Block	Sag Resist	Durability	Recycled Content	Recycle Program	Warranty
NRC +	CAC									
N/A	35	-	Class A	0.80	•	Std	Std	Std	•	1-Yr
N/A	33	-	Class A	0.80	•	Std	Std	Std	•	1-Yr

¹ Total Acoustics™ ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.

SUSPENSION SYSTEMS



PHYSICAL DATA

Material

Wet-formed mineral fiber

Surface Finish

Factory-applied latex paint

Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled.)

ASTM E1264 Classification

Type III, Form 2, Pattern J Z
Fire Class A

Humidity/Sag Resistance

Standard performance ceiling tiles, adequate where the building is enclosed and the HVAC is continuously functioning.

Anti-Mold/Mildew

Ceiling panels with BioBlock® coating contain a mold-inhibiting agent that resists the growth of mold and mildew.

Insulation Value

R Factor - 1.6 (BTU units)
R Factor - 0.28 (Watts units)

30-Year Performance Guarantee & Warranty

When installed with Armstrong® Suspension System. Details at armstrong.com/warranty

Weight; Square Feet/Carton

0.90 lbs/SF; 48 SF/ctn

Minimum Order Quantity

1 carton