

MESA™/MESA™ Second Look®

Square Lay-in & Tegular
fine texture



See more photos at:
armstrong.com/photogallery
SEARCH: mesa

Fine-textured visual with good sound absorption and excellent sound-blocking options. Second Look® items offer a scored visual.

KEY SELECTION ATTRIBUTES

- Fine-textured visual
- Excellent sound-blocking option
- USDA Certified Biobased Product – 100%
- Non-directional visual reduces installation time and scrap (excludes Second Look items)
- Smaller size panels available (1 carton min. order). Info: armstrong.com/specials
- 30-Year Limited System Warranty against visible sag, mold and mildew

TYPICAL APPLICATIONS

- Offices/conference rooms
- Healthcare – assists in addressing HIPAA, HCAHPS and FGI acoustical requirements (excludes items 680 and 683)
- Schools/classrooms
- Corridors
- Lobbies/reception areas
- Computer rooms

COLOR



White

FACE VIEW



Mesa Second Look II panel – Scoring created nominal 24 x 24" squares

DETAILS (Other Suspension Systems compatible. Refer to listing on page 206.)



1. Mesa
2. Mesa with Suprafine 9/16" suspension system

MESA™/MESA™ Second Look®

Square Lay-in & Tegular
fine texture


USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 100%

UP TO 56%

RECYCLED
CONTENT

Calculate LEED contribution at
armstrong.com/greengenie

LEED®

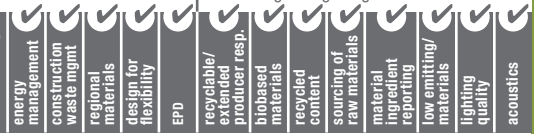

LOCATION DEPENDENT

VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 295-299 armstrong.com/ catdwgs	Item No.	Dimensions (Inches)		
MESA™					
15/16" Square Lay-in		1	680	24 x 24 x 3/4"	
		1	683	24 x 48 x 3/4"	
		1	Other Size Panels	W: 12" – 30" / L: 18" – 72" 3/4" Thick	
15/16" Angled Tegular		13	681	24 x 24 x 3/4"	
		13	686	24 x 24 x 3/4"	
		13	684	24 x 48 x 3/4"	
		13	Other Size Panels	W: 12" – 30" / L: 18" – 72" 3/4" Thick	
		13	685	24 x 48 x 3/4"	
9/16" Beveled Tegular		29, 44, 48, 52, 56, 60	682	24 x 24 x 3/4"	
		29, 44, 48, 52, 56, 60	687	24 x 24 x 3/4"	
		29, 44, 48, 52, 56, 60	685	24 x 48 x 3/4"	
		29, 44, 48, 52, 56, 60	Other Size Panels	W: 12" – 30" / L: 18" – 72" 3/4" Thick	

MESA™ Second Look® II

15/16" Angled Tegular	11	688	24 x 48 x 3/4"	
-----------------------	----	------------	----------------	--

¹ Total Acoustics™ ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. HRC items not available in other sizes.

PERFORMANCE SELECTION

Dots represent high level of performance.

NRC + CAC	Total Acoustics ¹	Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Scratch	Recycled Content	Recycle Program	30-Yr Warranty
UL Classified Acoustics	UL Classified Acoustics	Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Scratch	Recycled Content	Recycle Program	30-Yr Warranty
0.60	33	–	Class A	0.85	•	•	•	•	•	•
0.60	33	–	Class A	0.85	•	•	•	•	•	•
N/A	N/A	–	Class A	0.85	•	•	•	•	•	•
0.60	35	✓	Class A	0.85	•	•	•	•	•	•
0.60	40	✓	Class A	0.85	•	•	•	•	•	•
0.60	35	✓	Class A	0.85	•	•	•	Std	•	•
N/A	N/A	–	Class A	0.85	•	•	•	Std	•	•
0.60	35*	✓	Class A	0.85	•	•	•	•	•	•
0.60	40	✓	Class A	0.85	•	•	•	•	•	•
0.60	35	✓	Class A	0.85	•	•	•	Std	•	•
N/A	N/A	–	Class A	0.85	•	•	•	Std	•	•
0.60	35	✓	Class A	0.85	•	•	•	•	•	•

SUSPENSION SYSTEMS

* CAC reduced two points on these suspension systems



PHYSICAL DATA

Material

Wet-formed mineral fiber

Surface Finish

Factory-applied latex paint

Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled.)

ASTM E1264 Classification

Type III, Form 2, Pattern C E
Fire Class A

Humidity/Sag Resistance

HumiGuard® Plus ceiling panels maintain superior sag resistance. Recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

Anti-Mold/Mildew

Ceiling panels with BioBlock® coating contain a mold-inhibiting agent that resists the growth of mold and mildew.

VOC Emissions

Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

Primary (Embodied) Energy

See all LCA information on our EPD's.

High Recycled Content

Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value

R Factor – 1.6 (BTU units)
R Factor – 0.28 (Watts units)

Design Consideration

Do not mix Mesa Second Look with Standard Mesa in the same room.

30-Year Performance Guarantee & Warranty

When installed with Armstrong® Suspension System. Details at armstrong.com/warranty

Weight; Square Feet/Carton

680, 681, 682 – 1.02 lbs/SF; 48 SF/ctn
683, 684, 685 – 1.02 lbs/SF; 64 SF/ctn
686, 687 – 1.40 lbs/SF; 48 SF/ctn
688 – 1.02 lbs/SF; 64 SF/ctn

Minimum Order Quantity

1 carton, excludes other size panels

Metric Items Available

680M, 683M, 682M, 681M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

TechLine™ / 1 877 ARMSTRONG
armstrong.com/commceilings
(search: mesa)
BPCS-3642-615

LEED® is a registered trademark of the U.S. Green Building Council
All other trademarks used herein are the property of AWI Licensing
Company and/or its affiliates © 2015 AWI Licensing Company
Printed in the United States of America