


# SHEETROCK® Brand Acoustical Sealant

**Preparation**

Installation of SHEETROCK Brand Acoustical Sealant should not begin until building is enclosed and building temperatures are maintained at 55 °F (13 °C) minimum. Provide adequate ventilation to carry off excess moisture. Surface to be caulked must be clean, dry, and free of dust.

**Application**

Use a caulking-type gun. Apply 1/4" minimum round bead of sealant (1/2" maximum) to seal perimeter of sound-rated partition. Seal sound-rated partitions on both sides where facings abut dissimilar materials: around perimeter, in the angle formed by panels and abutting dissimilar materials; at all intersections; at all panel terminations in door and window frames; and at control joint locations before attaching the control joint to the panels. Apply continuous beads of sealant around all openings formed for outlets, lights, etc. Completely butter the outside of electrical boxes. Cut gypsum panels with 1/8" maximum relief at perimeter to receive sealant. Install before sealant skins.

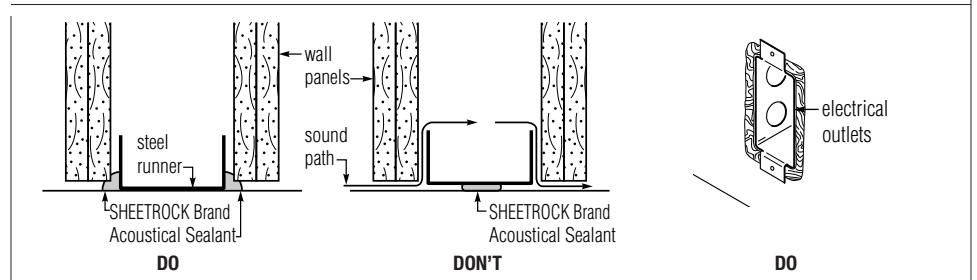

**Trademarks**

The following trademarks used herein are owned by United States Gypsum Company or a related company: SHEETROCK.

**Note**

Products described here may not be available in all geographic markets. Consult your U.S. Gypsum Company sales office or representative for information.

**Notice**

We shall not be liable for incidental or consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than their intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from the date it was or reasonably should have been discovered.

**SAFETY FIRST!**

Follow good safety practices. Read material safety data sheets and related literature on products before specification and/or installation.

